

# AC 200 MAX

Expandable up to 8,192Wh

2,200W | 2,048Wh



Emergency Supply



Camping Trip



RV Group



Backup Power



# Unleash Limitless Power, Anytime, Anywhere



Air Conditioner  
(1,000W)  
**1.6 Hrs**



Hair Dryer  
(1,300W)  
**1.3 Hrs**



Microwave  
(600W)  
**2.7 Hrs**



Electric Hammer  
(800W)  
**2 Hrs**



Heater  
(1,800W)  
**0.9 Hrs**




Coffee Maker  
(800W)  
**2 Hrs**



Dishwasher  
(1,300W)  
**1.3 Hrs**



Electric Grill  
(1,560W)  
**1 Hrs**

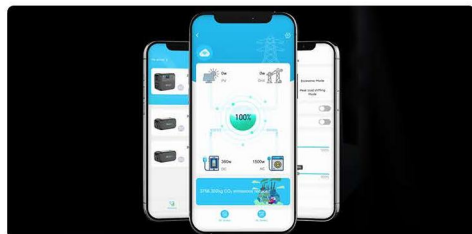

## CONTROL AT YOUR FINGERTIPS

From monitoring battery levels and power usage to adjusting settings and performing firmware upgrades, all it takes is a few taps on your phone.



## DUAL FAST CHARGING

With its dual charging capability, you can simultaneously recharge the AC200MAX from two sources, saving you valuable time and minimizing any downtime.



## EXPANDABLE POWER SOLUTION

Simply connect B230 or B300 expansion batteries to amplify your energy storage. With 2 x B300 units, you'll get a massive 8,192Wh of capacity - enough to get you through a prolonged power outage.

## AC200MAX Specifications

### General

Model	AC200MAX
Capacity	2,048Wh
AC Output	2,200W
Net Weight	61.9lbs (28.1kg)
Dimensions (L x W x H)	16.5 x 11 x 15.2in (420 x 280 x 386.5mm)
Charging Temperature	32°F-104°F (0°C-40°C)
Discharging Temperature	-4°F-104°F (-20°C-40°C)

### Input

AC Charging	500W Max
Solar Charging	MPPT 900W Max
Car Charging	12 / 24V 8A
Solar+AC Charging	1400W Max

### Output

AC Socket	5 (For 100V~120V Model) or 4 for (220~240V Model)
1 x 12V / 10A	Cigarette Lighter Port
1 x 12V / 30A	RV Port
2 x 12V / 10A	DC5521 Port
2 x 18W Max.	USB-A
2 x 15W Max.	USB-A
1 x 100W Max.	USB-C
2 x 15W Max.	Wireless Charging Pad



US / JP



EU



UK



AU



SA



CN

## B230 Specifications

### General

Capacity	2,048Wh (51.2V, 40Ah)
Type	Lithium iron phosphate (LiFePO4)
Life Cycles	3,500+ Cycles to 80% Original Capacity
Net Weight	48lbs (21.8kg)
Dimensions (L x W x H)	16.5 x 11 x 8.9in ( 420 x 280 x 227.5mm)
Charging Temperature	32°F-104°F (0°C-40°C)
Discharging Temperature	-4°F-104°F (-20°C-40°C)
Certifications	UL,CE,FCC,PSE,EMC,RoHS,UN38.3

### Input

AC Input	500W Max.
Solar Input	500W Max., 12V-60VDC, 10A Max.

### Output

1 x 100W	Max. USB-C Port
1 x 18W	USB-A Port
1 x 12V / 10A	Car Outlet

